



Archived resources

For further resources and
documentation please visit us:
www.cinos.net



EC-100-LSXT+-1000

SXGA+ 80-INCH DLP® REAR-PROJECTION CUBE
WITH CLUSTER-LED PROJECTION TECHNOLOGY



) PRODUCT DESCRIPTION

The eyevis **EC-100-LSXT+-1000** is a modular rear-projection cube with a **screen diagonal of 100 inch** (ca. 254 cm) and **SXGA+ resolution (1400 x 1050 pixels)**. The EC-100-LSXT+-1000 uses innovative Cluster-LED technology for illumination. EC-100-LSXT+-1000 is a revolutionary development by eyevis and manufactured in Germany. It is especially designed for applications which require a reliable 24/7 operation. Thanks to Cluster LEDs with a higher light output we are able to provide the EC-1000 series as a second generation of our rear-projection cubes with enhanced brightness level.

Although in most installations of our standard cubes in control rooms the brightness is absolutely adequate, certain applications e.g. in presentation areas, however, may require a higher brightness of the displayed image. To meet these higher demands, we have fitted the projectors of our proven EC rear-projection cubes with Cluster-LED technology. In comparison to standard LEDs these provide a remarkably higher light output. The cubes from the EC-1000 Series are available in XGA, SXGA, SXGA+, UXGA, Full HD, WUXGA and WQXGA.

While our standard cubes still use tried and tested standard LEDs as the light source for the projector, the projectors in the cubes from the EC-1000 Series feature Cluster-LEDs, where the active LED surface is divided into several sections. Besides higher light output this also guarantees that in the event of a failure of a single LED section, the image is preserved in almost its entire condition. Of course, all optional features that make our rear-projection units so flexible to use are also available for the EC-1000 Series. This includes the various available screens, different basement options, optimization features for installations in broadcast areas, or the automatic colour/brightness adjustment system for cube walls (ACT).

) THE ADVANTAGES AT A GLANCE

DURABILITY

- Durable and constant picture quality on all Cubes
- Modular, highly available display concept for 24/7 operation
- Low service and maintenance costs

COLOUR-RESCUE-CONTROL

- Special operation mode to compensate defect LED modules
- Image remains visible even with one or two defective LEDs
- Colour replacement according to the customer's image content

OUTSTANDING IMAGE QUALITY


- High contrast and best brightness
- Colour uniformity and wide viewing angle
- Best visibility in any lighting condition

) ECO-FRIENDLY CONCEPT




HEATPIPE COOLING SYSTEM

As with all other eyevis LED cubes, the EC-1000 Series continues to rely on our innovative heatpipe cooling system, which has proven its reliable and highly effective function in thousands of cubes in diverse operating conditions. In addition to that, our heatpipes require absolutely no servicing and contain no toxic liquids.



LOW POWER CONSUMPTION

Although the cubes from the EC-1000 Series have a higher light output, power consumption has not risen (c.f. table below). For typical applications like in control rooms, the power consumption is even up to 20% less compared to values of our standard cubes. At the same time the heat dissipation of the cubes could be lowered, which reduces the demands on the HVAC systems in control rooms. Thus, the devices from the EC-1000 Series are not only brighter, they also save energy.

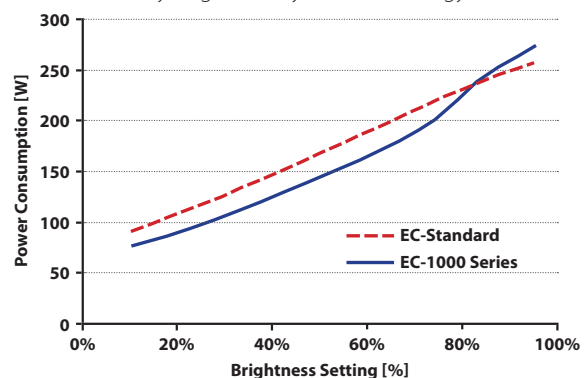

INTEGRATED OPTIMISING OPTIONS

- Perfect system adjustment with eyeDevice Setup software
- Fast and easy parameter setting
- Optional Multi-Cube Auto-Colour-Tracking

PRECISION SCREEN CONCEPT

- Different screen options available to suit any requirements
- Minimum gaps between cubes thanks to clipping method
- Very easy and fast installation

AVAILABILITY AND RELIABILITY

- Extremely long lifetime of the LED lights
- Qualitative high value components
- Highly efficient maintenance-free heatpipe cooling



EC-100-LSXT+-1000

SXGA+ 100-INCH DLP® REAR-PROJECTION CUBE WITH CLUSTER-LED PROJECTION TECHNOLOGY



) TECHNICAL SPECIFICATIONS

Type:	EC-100-LSXT+-1000, eyevisCube 100" with Cluster-LED illumination and native SXGA+ resolution
Description:	Digital 100 inch DLP®-rear-projection unit for data and video representation
Resolution:	1400 × 1050 Pixel (SXGA+/4:3) / Chip: DMD-Chip SXGA+ / LVDS 0.95"
Brightness:	HB Screen Scheibe: 230 cd/m ² (max.) / 198 cd/m ² (typ.) Beta Screen Scheibe: 125 cd/m ² (max.) / 107 cd/m ² (typ.)
Contrast Ratio:	1500:1 (max. 5000:1 dynamic contrast)
Brightness Uniformity:	≥95% (SUR25)
Image Size (W×H):	2000 × 1500 mm (ca. 100 inch / ca. 254 cm screen diagonal)
Dimensions (W×H×D):	2000 × 1628 × 1350 mm
Weight:	TBD
Input:	1× DVI-D, optional with Scaler Board: 2× RGB, 2× DVI, 2× Composite Video, 1× Y/C, 1×YUV, 1× S-Video
Projection Screen:	High Brightness Screen, Beta Screen
Frame:	0.3 mm
Power Consumption:	normal operation: 210 W (typ.) / reduced power mode 120 W / max. 300 W
Heat Dissipation:	716 BTU/h (typ.)
Median LED Lifetime:	>60,000 hrs under normal environmental conditions / L70B50 manufacturer information) (75,000 - 90,000 hrs in 'Low Power Operation Mode', i.e. additional 15,000 to 30,000 hrs depending on the amount of power reduction)
Software:	eyeDevice Setup Software

ENVIRONMENTAL

Temperature Conditions:	10-40° C / recommended 15 - 25 °C / for Seamless Screens 18 - 25 °C / Storage: 0 - 50 °C
Humidity:	0% - 80 % not condensing
Altitude:	0 - 3000 m
Noise Level:	≤ 36 dB

OPTIONS

<ul style="list-style-type: none"> ▪ Different screen versions to suit the requirements of different fields of application (viewing angles, brightness uniformity, etc.) ▪ Scaler Board (internal split controller up to 10x10 Matrix, with 2x DVI, 2x RGB, 2x Video) ▪ ACT - Auto-Colour Tracking, auto-adjustment of brightness and colours for each display according to the adjusted values ▪ EYE-MSP - Matrix-Shading-Processor integrated in cube ▪ EYE-MDP - Matrix and Delay Processor integrated in cube ▪ EYE-SCP - Shading and Colour Processor integrated in cube ▪ EC-MAS - Motorized geometry adjustment via IR remote control or PS2 ▪ Network Board ▪ Service and Maintenance Contracts ▪ Different Basement Options: Standard Basement, Basements on Wheels, Basements on Rails, Anti-Vibration Basements
--



eyevis GmbH

Hundsschleestr. 23 • 72766 Reutlingen • Germany
 Phone: + 49 (0) 7121 43303 - 0 • Fax: + 49 (0) 7121 43303 - 22
 www.eyevis.de • info@eyevis.de

As at: 31.08.2013/V1.2 • Subject to change!

All trademarks and registered trademarks are the property of their respective owners. Copyright © 2013 eyevis GmbH. All rights reserved.

For further resources and
documentation please visit us:
www.cinos.net