



Archived resources

For further resources and
documentation please visit us:
www.cinos.net

Synology DiskStation DS3611xs

Ultra-High performance NAS Server Scales up to 100TB for Large Scale Business



Synology® DiskStation DS3611xs offers ultra-high performance, scalable and full-featured network attached storage solution for large scale businesses that require an efficient way to centralize data protection, simplify data management, deploy virtualization solutions, and rapidly expand storage capacity with minimal time spent on setup and management. Synology DS3611xs is backed with Synology's 3-year limited warranty.

Highlights

- Ultra-high performance of 1000+ MB/sec throughput and 100,000+ IOPS¹
- Scale up to 100TB with Synology DX1211²
- Dual 10GbE ports support (with PCI-E add-on card)
- VMWare, Citrix, Microsoft Hyper-V compliance
- Expandable ECC RAM module (up to 8GB)
- Running on Synology DiskStation Manager (DSM) with various business features

Ultra-High Performance and Data Availability

With Link Aggregation, Synology DS3611xs delivers the high performance of over 1000 MB/sec throughput and 100,000 IOPS under RAID 5 configuration¹. In addition to the default 4 Gigabit ports, dual 10GbE are supported with the add-on PCI Express x8 Gen2 Network Interface Card to maximize the system bandwidth. The network ports with failover support combining with hot-swappable drives will ensure continual service uptime during drives replacement or unexpected LAN failure.

The ECC RAM module on DS3611xs will detect and correct errors that occur during data transmission. Supporting up to 8GB ECC RAM, DS3611xs provides secure data protection and ultra-high performance to meet the need of large scale businesses for a strong foundation to face mission-critical tasks.

Robust Scalability Up to 100 TB

Synology DS3611xs is also designed to grow with your business and provides the ability to seamlessly expand a single volume up to 100TB on the fly. When the storage capacity of DS3611xs is nearing its limits, it can easily be expanded with Synology DX1211³. It is connected to DS3611xs via an Infiniband cable that carries 12 Gb/s SATA signal to ensure maximum throughput.

Management of the large storage space on DS3611xs is simple and flexible. Multiple Volumes on RAID allows users to create more than one volume on a RAID structure, providing a flexible and efficient way to manage the storage across all hard drives. When the need for more space arises, the volume could be easily expanded without any service disruption.

Unified-Architecture and Virtualization Ready

Synology DS3611xs runs on the novel operating system, Synology DiskStation Manager (DSM), which integrates file-level and block-level storage in one unified storage system. Comprehensive network protocol support (CIFS/SMB, AFP and NFS) assures seamless file sharing across Windows, Mac, and Linux platforms.

iSCSI is also supported as the ideal alternative to SAN solution for business. Affordable and cost-effective iSCSI allows large scale business to consolidate storage into data center storage arrays while providing hosts with the illusion of locally-attached disks. With the iSCSI support, DS3611xs provides a seamless storage solution for virtualization servers, such as VMware, Citrix, and Hyper-V.

Thin Provisioning is available for file-level iSCSI, enabling administrators to oversubscribe provision and then grow storage space as needed in safety. With Thin Provisioning, users are able to maximize the storage utilization to reduce the total cost of ownership for the storage system.

Complete Backup and Disaster Recovery Solutions

Synology DS3611xs offers a centralized backup target to consolidate fragmented and unstructured data across the network. Integrating easily into a current network structure and compatible with Windows®, Mac®, and Linux systems, DS3611xs provides the entire office data redundancy and protection. PC Users can back up their data to DS3611xs using the free Synology Data Replicator software, while Mac OS X users enjoy native Apple® Time Machine® integration. A backup wizard is also provided for backing up data in DS3611xs to another DiskStation, expansion unit or any rsync server via an encrypted transmission. Furthering options, the wizard also makes it easy to back up to the cloud via Amazon® S3.

Shared Folder Sync is also available in DSM as a solution for disaster recovery. With Shared Folder Sync, DS3611xs is able to replicate data to another DiskStation within the Intranet or across the Internet, helps to reduce the risk of business interruption.

Rich Business Applications

Windows ADS integration allows Synology DS3611xs to quickly and easily fit in an existing business environment without recreating user accounts. Windows ACL support on DS3611xs provides much finer-grained access control and efficient privilege settings, allowing IT staffs to set up privileges to files and folders on DS3611xs through their familiar Windows user interface.

Internet file access is simplified by the encrypted FTP server and the web-based file explorer, Synology File Station. HTTPS, firewall, and IP auto-block support ensure file sharing over the Internet is protected at a high security level.


Synology Surveillance Station offers a centralized interface to safeguard the office environments by deploying up to 50 IP cameras throughout the network. There are several features to customize your surveillance solution including video live-view, video recording, event playback, intelligent event search, and PTZ. The AJAX-based web interface provides the ability to observe your environment anytime and anywhere.

Energy Efficient Design

Synology DS3611xs is designed and developed with energy efficiency in mind. Compared with the average storage server counterparts, DS3611xs consumes a relatively low amount of power and have the hard drives hibernate when not in use.

All Synology products are produced with RoHS compliant parts and packed with recyclable packing materials. Synology acknowledges the responsibility as a global citizen to continually work to reduce the environmental impact of every product produced.

CONNECTIONS & BUTTONS

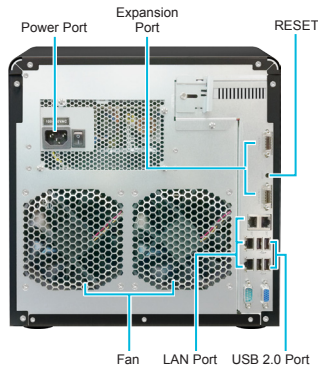

Technical Specifications

Hardware

- CPU: Dual Core 3.1GHz, with floating point
- RAM Size: ECC RAM 2GB
- Internal HDD*: 12X 3.5" SATA(II) or 12X 2.5" SATA/SSD
- External HDD Interface: 4X USB ports
- Expansion Interface: 2X Expansion port
- Size (H X W X D): 310 mm X 300 mm X 340mm
- Weight: 10.53 kg
- LAN: 4X Gigabit (10 GbE X2 add-on card is supported)

- Fan: 120mm X 120mm X2
- Wake on LAN
- Power Recovery
- AC Input Power Voltage: 100V to 240V
- Power Frequency: 50Hz to 60Hz, Single Phase
- Max Internal Capacity: 36TB (12X 3TB hard drives)¹⁾
- Operating Temperature: 5°C to 35°C (40°F to 95°F)
- Storage Temperature: -10°C to 70°C (15°F to 155°F)

- Relative Humidity: 5% to 95% RH
- Max Operating Altitude: 10,000 feet
- Power Consumption*: 132 W (Access); 57.2 W (HDD Hibernation)
- Certification: FCC Class B, CE Class B, BSMI Class B

Applications

File Station

- FTP Server**
- Bandwidth Control
 - Custom FTP Passive Port Range
 - Anonymous FTP
 - Transfer Log

Mail Server

- Supported Mail Server Protocol : POP3, SMTP, IMAP

Web Station

- Virtual Host (up to 30 websites)
- PHP/MySQL
- Alternative HTTP Error Page
- 3rd-Party Applications Support

Surveillance Station

- Default IP cam #: 1
- MAX IP cam # (licenses required): 50²⁾

Photo Station

- Supported Image Format: BMP, JPG (jpe, jpeg), GIF, RAW (arw, srf, sr2, dcr, k2c, kdc, cr2, crw, nef, mrv, ptx, pef, raf, 3fr, erf, mef, mos, orf, rw2, dng, x3f)
- Supported Video Format*: 3G2, 3GP, ASF, AVI, DAT, DivX, FLV, M4V, MOV, MP4, MPEG, MPG, QT, WMV, XviD, RM, RMVB, VOB, RV30, RV40, AC3, AMR, WMA3

Download Station

- Supported Download Protocols: BT/HTTP/FTP/NZB/eMule
- Custom BitTorrent Port Range
- BitTorrent / eMule Bandwidth Control

Audio Station

- Supported Audio Format: (USB Mode) AAC, FLAC, M4A, MP3, Ogg Vorbis, WMA, WMA VBR; (Streaming Mode) MP3, M4A, M4B
- Supported Playlist Format: M3U, WPL
- Internet Radio: SHOUTcast, Radioio

DLNA/UPnP Media Server

- PS3/Xbox 360 Support
- Supported Audio Format: AAC, FLAC, M4A, MP3, Ogg, Vorbis, PCM, WAV, WMA, WMA VBR, WMA PRO, WMA Lossless
- Supported Video Format: 3GP, 3G2, ASF, AVI, DAT, DivX, DVR-MS, ISO, M2T, M2TS, M4V, MKV, MP4, MPEG1, MPEG2, MPEG4, MTS, MOV, QT, SWF, TP, TRP, TS, VOB, WMV, XviD, RV30, RV40, AC3, AMR, WMA3
- Supported Image Format: BMP, JPG (jpe, jpeg), GIF, ICO, PNG, PSD, TIF (tiff), UFO, RAW (arw, srf, sr2, dcr, k2c, kdc, cr2, crw, nef, mrv, ptx, pef, raf, 3fr, erf, mef, mos, orf, rw2, dng, x3f)

- Supported Subtitles Format: srt, psb, smi, ass, ssa, sub, idx,ifo

iTunes Server

- Supported Audio Format*: MP3, M4A, M4P, WAV, AIF
- Supported Video Format: M4V, MOV, MP4
- Supported Playlist Format: M3U, WPL

Printer Server¹⁰⁾

- Max Printer #: 2
- Printing Protocols: LPR, CIFS, AppleTalk AirPrint, Multi Functional Print Server

Synology Packages

- Mail Station 2
- Squeezebox Server
- Webalizer
- phpMyAdmin
- Time Backup
- HASP

iPhone/Android Applications

- DS photo+
- DS audio
- DS cam
- DS file (iPhone only)
- DS finder (iPhone only)

General Specifications

Networking Protocols

- CIFS, AFP, FTP, iSCSI, Telnet, SSH, NFS, SNMP

File System

- EXT4
- EXT3 (External Disk Only)
- FAT (External Disk Only)
- NTFS (External Disk Read Only)

Volume Management

- Synology Hybrid RAID
- Max Volume #: 1024
- Max iSCSI Target #: 64
- Max iSCSI LUN #: 512
- Volume Type: Basic, JBOD, RAID 0, RAID 1, RAID 5, RAID 5+Spare, RAID 6, RAID 10
- RAID Migration: from Basic to RAID 1, Basic to RAID 5, Basic to RAID 5+Spare, RAID 1 to RAID 5, RAID 1 to RAID 5+Spare, RAID 5 to RAID 5+Spare, RAID 5 to RAID 6
- Expand RAID 1, RAID 5, RAID 5+Spare or RAID 6 with Larger Hard Drives
- Expand RAID 5, RAID 5+Spare or RAID 6 by Adding a Hard Drive On The Fly

File Sharing Capability

- Max User Account: 4096
- Max Group: 512
- Max Shared Folder: 512

- Max Concurrent Connections (SMB, AFP, FTP, AFP): 1024

Windows ADS Domain Integration

- Domain Users login via Samba/AFP/FTP/File Station

Backup Solutions

- Network Backup
- Local Backup
- Desktop Backup (using Synology Data Replicator 3 or Apple Time Machine backup application)
- 3rd-Party Backup Support

Security

- FTP over SSL/TLS
- IP Auto-Block
- Firewall
- Encrypted Network Backup over Rsync
- HTTPS Connection

Management

- DSM Upgrade
- Email Notification
- SMS Notification
- Customized User Quota
- DDNS Support
- PPPoE
- Resource Monitor
- UPS Management

- Scheduled Power On/Off
- Custom Management UI HTTP/HTTPS Ports

HDD Management

- HDD Hibernation
- S.M.A.R.T.
- Dynamic Bad Sector Mapping

Utilities

- Synology Assistant
- Synology Data Replicator

Support Browsers

- Internet Explorer 7/8/9
- Firefox 3.5/3.6
- Safari 4/5 (Mac)
- Chrome

Supported Clients

- Windows 2000 onward
- Mac OS X 10.3 onward
- Ubuntu 9.04 onward

Language

- English, Deutsch, Français, Italiano, Español, Dansk, Norsk, Svensk, Nederlands, Русский, Polski, Magyar, Português do Brasil, Português Europeu, Türkçe, Český, 日本語, 한국어, 繁體中文, 简体中文

Environment and Packaging

Environment

- RoHS Compliant

Package Content

- DS3611xs Main Unit
- Installation DVD

- Welcome Note
- Assembling Kit
- AC Power Cord X2

Optional Accessories

- Remote
- Camera License Pack
- Expansion Unit (DX1211)

SYNOLOGY INC.

Founded in 2000, Synology is a young and energetic company dedicated to developing high-performance, reliable, versatile, and environmentally-friendly Network Attached Storage (NAS) products. Our goal is to deliver user-friendly solutions and solid customer service to satisfy the needs of businesses, home offices, individual users and families.

Copyright © 2011, Synology Inc. All rights reserved. Synology, the Synology logo are trademarks or registered trademarks of Synology Inc. Other product and company names mentioned herein may be trademarks of their respective companies. Synology may make changes to specification and product descriptions at anytime, without notice. Printed in Taiwan, DS3611xs-2011-ENU-REV005

<http://www.synology.com>

Headquarters

Synology Inc.
3F-3, No. 106, Chang An W. Rd., Taipei, Taiwan
Tel: +886 2 2552 1814 Fax: +886 2 2552 1824

North & South America

Synology America Corp.
2899 152nd Ave NE, Redmond, WA 98052, USA
Tel: +1 425 818 1587

UK


Synology UK Ltd.
Davy Avenue, Knowlhill,
Milton Keynes, Bucks,
MK5 8PB, UK
Tel: +44 01908 673 709

1. Tested with dual 10GbE connection with Link Aggregation. The performance figures could vary on different environments.
2. Purchase separately.
3. DS3611xs supports up to 2 Synology DX1211.
4. Hard drive not included.
5. The actual capacity will differ according to volume types.

6. Measured with 12 Western Digital 2TB WD2002FPYS hard drive. The figures could vary on different environments.
7. 1 free license to install 1 IP camera. Additional licenses can be purchased to expand the license quota.
8. User can click and download the following video formats: RM, RMVB, VOB, RV30, RV40, AC3, AMR, WMA3, but not able to play it

9. The music in WAV and AIF format can be streamed, but the metadata (ex: title, album) may not be indexed on the iTunes.
10. For Mac users, DS3611xs supports PostScript USB printers only.

Networking

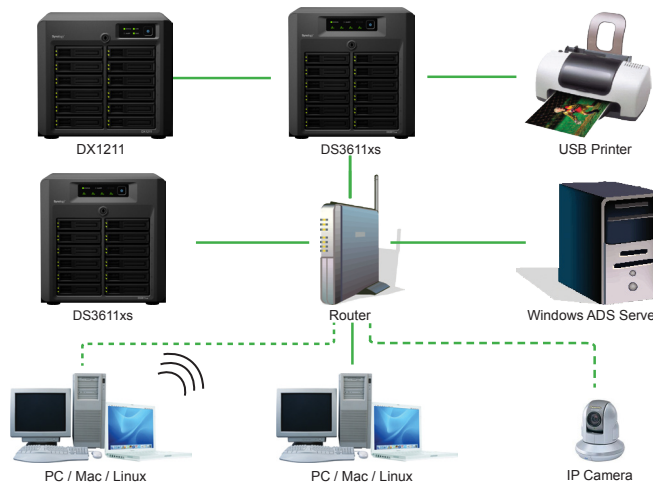

For further resources and
documentation please visit us:
www.cinos.net