



Archived resources

For further resources and
documentation please visit us:
www.cinos.net

3-Series Control System®

- > Next generation control system
- > 3-Series™ Control Engine — substantially faster and more powerful than other control systems
- > Exclusive modular programming architecture
- > Onboard 1GB RAM & 4GB Flash memory
- > Expandable storage up to 1TB
- > Rear panel memory card slot
- > High-speed USB 2.0 host port
- > Industry-standard Ethernet and Cresnet® wired communications
- > Control Subnet — provides a dedicated local network for Crestron® devices
- > XPanel with Smart Graphics™ computer and Web based control
- > iPhone®, iPac®, Android™, and Samsung Smart TV® control app support
- > Crestron Fusion™ Enterprise Management Software support
- > SNMP support
- > Two RS-232/422/485 COM ports with hardware and software handshaking
- > Four RS-232 COM ports with software handshaking only
- > 8 IR/serial, 8 relay, and 8 Versiport I/O ports
- > Three built-in 3-Series™ control card expansion slots
- > Native BACnet®/IP support^[2]
- > IEC 61000-4-5 Installation Class 4 surge immunity on COM, Versiport, and network connections^[4]
- > Installer setup via front panel, Crestron Toolbox™ or Internet Explorer®^[3]
- > Backwards compatible to run existing SIMPL programs
- > Full Unicode (multi-language) support
- > Increased network throughput and security
- > Secure access through Active Directory integration or standalone account management
- > Hardware level security using 802.1x authentication
- > IIS v.6.0 Web Server
- > IPv6 ready
- > Front panel color LCD display for setup and diagnostics
- > Front panel USB computer console port
- > 2-space rack-mountable



3-Series Control Systems

Today's commercial buildings and custom homes comprise more technology than ever before, and all these systems need to be networked, managed, and controlled in fundamentally new ways. The IP based 3-Series platform is engineered from the ground up to deliver a network-grade server appliance capable of faithfully handling everything from boardroom AV and home theater control to total building management.

3-Series embodies a distinctively robust, dynamic, and secure platform to elevate your system designs to higher levels of performance and reliability. Compared to other control systems, Crestron 3-Series provides a pronounced increase in processing power and speed with more memory, rock solid networking and IP control, and a unique modular programming architecture.

Modular Programming Architecture


Designed for enhanced scalability, the PRO3 affords high-speed, real-time multi-tasking to seamlessly run multiple programs simultaneously. This exclusive programming architecture lets programmers independently develop and run device-specific programs for AV, lighting, HVAC, security, etc., allowing for the optimization of each program, and allowing changes to be made to one program without affecting the whole. Even as your system grows, processing resources can easily be shifted from one 3-Series processor to another without rewriting any code. The end benefit is dramatically simplified upgradability with minimal downtime, whether implementing changes on site or remotely via the network.

Robust Ethernet & IP Control

IP technology is the heart of 3-Series, so it should be no surprise that its networking abilities are second to none. Gigabit Ethernet connectivity enables integration with IP-controllable devices and allows the PRO3 to be part of a larger managed control network. Whether residing on a sensitive corporate LAN, a home network, or accessing the Internet through a cable modem, the PRO3 provides secure, reliable interconnectivity with IP-enabled touch screens, computers, mobile devices, video displays, Blu-ray Disc® players, media servers, security systems, lighting, HVAC, and other equipment — whether on premises or across the globe.

The Crestron® PRO3 presents a new benchmark in control system technology. Featuring the 3-Series™ control engine, the PRO3 forms the core of any modern networked home or commercial building, managing and integrating all the disparate technologies throughout your facility to make life easier, greener, more productive, and more enjoyable. The PRO3 features an enhanced feature set including a front panel color LCD display, built-in control card expansion slots, and a dedicated Control Subnet port.

PRO3 3-Series Control System®

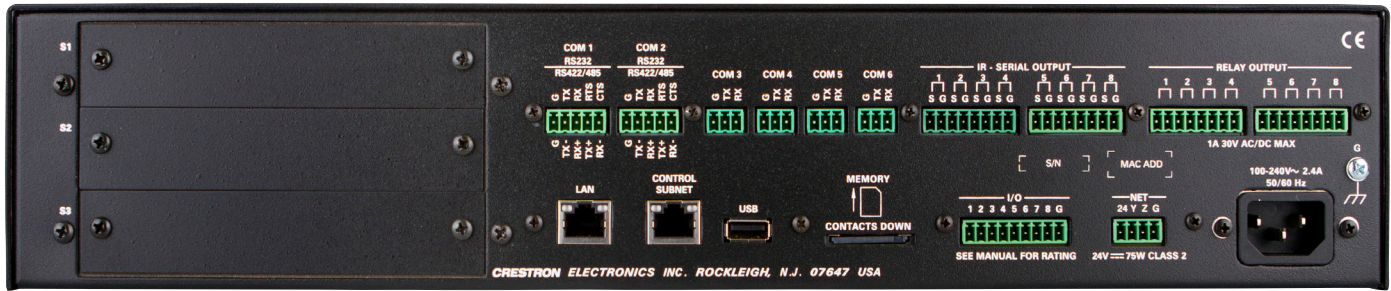

PRO3 – Rear View

Dedicated Control Subnet

The Crestron Control Subnet is a Gigabit Ethernet network dedicated to Crestron devices. Via the PRO3's Control Subnet port, an installer may simply connect a single touch screen or wireless gateway, or add a Crestron PoE switch (CEN-SW-POE-5, CEN-SWPOE-16, or CEN-SWPOE-24)^[1] to handle multiple touch screens, gateways, AV components and other devices. Auto-configuration of the entire subnet is performed by the PRO3, discovering each device and assigning IP addresses without any extra effort from the installer.

A separate LAN port on the PRO3 provides a single-point connection to the primary LAN, requiring just one IP address for the complete control system. The LAN port allows full interconnectivity between devices on the local subnet with other devices, systems, servers, and WAN/Internet connections outside the local subnet. For sensitive applications that require absolute security, the entire Control Subnet can be completely hidden from the primary LAN using Isolation Mode.

Control Apps & XPanel

Years ago, Crestron pioneered the world's first IP-based control system unleashing vast new possibilities for controlling, monitoring, and managing integrated systems over a LAN, WAN, and the Internet. Today, Crestron offers more ways than ever to control your world the way you want. Using a computer, smartphone, tablet, or Smart TV, Crestron lets you control anything in your home or workplace from anywhere in the world.

Native to every 3-Series control system, Crestron XPanel technology transforms any laptop or desktop computer into a virtual Crestron touch screen. Crestron control apps deliver the Crestron touch screen experience to iPhone®, iPad®, and Android™ devices, letting you safely monitor and control your entire residence or commercial facility using the one device that goes with you everywhere. Even Samsung Smart TV® has a Crestron control app available.

Crestron Fusion™ Enterprise Management

Crestron Fusion provides an integrated platform for creating truly smart buildings that save energy, enhance worker productivity, and prolong the life-span of valuable equipment. As part of a complete managed network in a corporate enterprise, college campus, convention center or any other facility, the AV3 works integrally with Fusion RV® Remote Asset Management Software to enable remote scheduling, monitoring, and control of rooms and technology from a central help desk. Fusion EM™ Energy Management Software enables organizations to reduce energy consumption by tracking real-time usage and automating control of lighting, shades, and HVAC.

SNMP Support

Built-in SNMP support enables integration with third-party IT management software, allowing network administrators to manage and control Crestron systems on the network in an IT-friendly format.

Cresnet®

Cresnet provides a dependable network wiring solution for Crestron keypads, lighting controls, thermostats, and other devices that don't require the higher speed of Ethernet. The Cresnet bus offers easy wiring and configuration, carrying bidirectional communication and 24VDC power to each device over a simple 4-conductor cable. To assist with troubleshooting, the PRO3 includes our patent-pending Network Analyzer which continuously monitors the integrity of the Cresnet network for wiring faults, marginal performance, and other errors.

Onboard Control Ports

In addition to Ethernet, the PRO3 includes six bidirectional COM ports and eight IR ports to interface directly with all of your centralized AV sources, video displays, and other devices. Eight programmable relay ports are included for controlling window shades, projection screens, lifts, power controllers, and other contact-closure actuated equipment. Eight "Versiport" I/O ports enable the integration of occupancy sensors, power sensors, door switches, or anything else that provides a dry contact closure, low-voltage logic, or 0-10 Volt DC signal.

Control Card Expansion Slots

Additional control ports can be added to the PRO3 using 3-Series Control Cards^[1]. The PRO3 provides three control card expansion slots on its rear panel, affording great expansion capability without requiring any additional rack space.

Front Panel Color LCD Display

The PRO3's front panel includes a color LCD display to enable extensive setup and diagnostics without having to connect a computer.

BACnet®/IP

Native support for the BACnet/IP communication protocol provides a direct interface to third-party building management systems over Ethernet, simplifying integration with HVAC, security, fire & life safety, voice & data, lighting, shades, and other systems. Using BACnet/IP, each system runs independently with the ability to communicate together on one platform for a truly smart building.^[2]



PRO3 3-Series Control System®

SPECIFICATIONS

Control Engine

3-Series™; real-time, preemptive multi-threaded/multitasking kernel; Transaction-Safe Extended FAT file system; supports up to 10 simultaneously running programs

Memory

SDRAM: 1 GB

Flash: 4 GB

Memory Card: supports SD^a and SDHC^a cards up to 32 GB

External Storage: support USB mass storage devices up to 1 TB

Communications

Ethernet: 10/100/1000 Mbps; auto-switching; auto-negotiating; auto-discovery; full/half duplex; industry-standard TCP/IP stack; UDP/IP; CIP; DHCP; SSL; IEEE 802.1X; SNMP; BACnet®/IP²; IPv4 or IPv6; Active Directory authentication; IIS v.6.0 Web Server; SMTP e-mail client; installer setup via Crestron Toolbox™ or MSIE³

Control Subnet: 10/100/1000 Mbps Ethernet, auto-switching, auto-negotiating, auto-discovery, full/half duplex, DHCP server, DNS Server, port forwarding, Isolation Mode

Cresnet®: Cresnet master mode

USB: Supports USB HID and USB mass storage class devices via rear panel USB 2.0 host port, supports computer console via front panel USB 2.0 device port

RS-232/422/485: For 2-way device control and monitoring, all ports support RS-232 up to 115.2k baud with software handshaking, two ports also support hardware handshaking, RS-422, and RS-485

IR/Serial: Supports 1-way device control via infrared up to 1.2 MHz or serial TTL/RS-232 (0-5 Volts) up to 115.2k baud

Connectors & Card Slots

S1 – S3: (3) 3-Series™ control card expansion slots

COM 1 – 2: (2) 5-pin 3.5mm detachable terminal blocks;

Bidirectional RS-232/422/485 ports⁴;

Up to 115.2k baud; hardware and software handshaking support

COM 3 – 6: (4) 3-pin 3.5mm detachable terminal blocks;

Bidirectional RS-232 ports⁴;

Up to 115.2k baud; software handshaking support

IR - SERIAL OUTPUT 1 – 8: (2) 8-pin 3.5mm detachable terminal block comprising (8) IR/Serial output ports;

IR output up to 1.2 MHz;

1-way serial TTL/RS-232 (0-5 Volts) up to 115.2k baud

RELAY OUTPUT 1 – 8: (2) 8-pin 3.5mm detachable terminal blocks comprising (8) normally open, isolated relays;

Rated 1 Amp, 30 Volts AC/DC;

MOV arc suppression across contacts

LAN: (1) 8-wire RJ45 jack;

10Base-T/100Base-TX/1000Base-T Ethernet port⁴;

Connects to the customer's LAN

CONTROL SUBNET: (1) 8-wire RJ45 jack;

10Base-T/100Base-TX/1000Base-T Ethernet port⁴;

Provides a dedicated local network for Crestron devices

USB: (1) USB Type A female;

USB 2.0 port for storage devices

MEMORY: (1) SD memory card slot;

Accepts one SD or SDHC card up to 32 GB for memory expansion

I/O 1 – 8: (1) 9-pin 3.5mm detachable terminal block comprising (8) "Versiport" digital input/output or analog input ports (referenced to GND) ⁴;

Digital Input: Rated for 0-24 Volts DC, input impedance 20k Ohms, logic threshold >3.125V low/0 and <1.875V high/1;

Digital Output: 250mA sink from maximum 24 Volts DC, catch diodes for use with "real world" loads;

Analog Input: Rated for 0-10 Volts DC, protected to 24 Volts DC maximum, input impedance 21k ohms with pull-up resistor disabled;

Programmable 5 Volts, 2k ohms pull-up resistor per pin

NET: (1) 4-pin 3.5mm detachable terminal block;

Cresnet master port, outputs power to Cresnet devices⁴;

See "Power Requirements" for additional specifications

100-240V~2.4A 50/60Hz: (1) IEC 60320 C14 main power inlet;

Mates with removable power cord, included

G: (1) 6-32 screw, chassis ground lug

COMPUTER (front): (1) USB Type B female;

USB 2.0 computer console port (6 ft cable included);

For setup only

LCD Display

Display Type: TFT active matrix color LCD

Size: 2.8 inch (72 mm) diagonal

Resolution: 320 x 240 pixels

Functions: Displays configuration menus, control port activity, and other system information

Controls & Indicators

PWR: (1) Green LED, indicates operating power supplied from AC line

NET: (1) Amber LED, indicates communication with the Cresnet system

MSG: (1) Red LED, indicates control system has generated an error message

HW-R: (1) Recessed pushbutton for hardware reset

SW-R: (1) Recessed pushbutton for software reset

CNPS FAULT: (1) Red LED and (1) pushbutton, LED indicates an excessive Cresnet load detected at the NET port, pushbutton resets the fault indication

SLOT 1 – 3: (3) Green LEDs, indicate control cards are inserted in the corresponding slots

Nav Pad: (1) 5-way navigation pad for menu navigation and parameter adjustment

HOME: (1) pushbutton, returns to the home menu

BACK: (1) pushbutton, steps menu back one level

PRO3 3-Series Control System®

LAN (rear): (2) Bi-color green/amber LEDs, left LED indicates Ethernet link status and connection speed, right LED indicates Ethernet activity
CONTROL SUBNET (rear): (2) Bi-color green/amber LEDs, left LED indicates Ethernet link status and connection speed, right LED indicates Ethernet activity

Power Requirements

Main Power: 2.4 Amps @ 100-240 Volts AC, 50/60 Hz
Available Cresnet Power: 75 Watts (3.125 Amps @ 24 Volts DC)

Environmental

Temperature: 41° to 113°F (5° to 45°C)
Humidity: 10% to 90% RH (non-condensing)
Heat Dissipation: 45 BTU/Hr with no Cresnet devices, no control cards;
71 BTU/Hr with full Cresnet load, no control cards;

See individual control card spec sheets for additional specifications

Enclosure

Chassis: Metal, black finish, vented top and sides
Faceplate: Extruded metal, black finish, polycarbonate label overlay
Mounting: Freestanding or 2U 19-inch rack-mountable (adhesive feet and rack ears included)

Dimensions

Height: 3.47 in (89 mm) without feet
Width: 17.28 in (439 mm), 19.00 in (483 mm) with rack ears
Depth: 10.13 in (258 mm)

Weight

5.0 lb (2.3 kg)

MODELS & ACCESSORIES

Available Models

PRO3: 3-Series Control System®

Available Accessories

C3COM-3: 3-Series™ Control Card - 3 COM Ports
C3IO-16: 3-Series™ Control Card - 16 Versiport I/O Ports
C3IR-8: 3-Series™ Control Card - 8 IR Ports
C3RY-8: 3-Series™ Control Card - 8 Relay Ports
C3RY-16: 3-Series™ Control Card - 16 Relay Ports
PWE-4803RU: PoE Injector
CEN-SW-POE-5: 5-Port PoE Switch
CEN-SWPOE-16: 16-Port Managed PoE Switch
CEN-SWPOE-24: 24-Port Managed PoE Switch
C2N-HBLOCK: Multi-type Cresnet Distribution Block
CNTBLOCK: Cresnet Distribution Block
CNSP-XX: Custom Serial Interface Cable
IRP2: IR Emitter Probe w/Terminal Block Connector

CRESTRON-APP: Crestron® App; refer to the iTunes® App Store for pricing and download

CRESTRON-APP-PAD: Crestron® for iPad® App; refer to the iTunes® App Store for pricing and download

CRESTRON-MOBILE-PRO: Crestron Mobile Pro® Control App for iPhone®, iPod touch®, and Android™; refer to the iTunes® App Store and Google Play™ for pricing and download

CRESTRON-MOBILE-PRO-G: Crestron Mobile Pro® G Control App for iPad®; refer to the iTunes® App Store for pricing and download

XPANEL: Crestron Control® for Computers

SW-MYCRESTRON: myCrestron Dynamic DNS Service for Crestron Systems

SW-FUSION-EM: Fusion EM™ Energy Management Software

SW-FUSION-RV: Fusion RV® Remote Asset Management Software

SW-ROOMVW-ENT: RoomView® Express - Remote Help Desk and Resource Management Software, Full License

SW-3SERIES-BACNET-50+: BACnet®/IP Support for 3-Series™ - Full license for more than 50 objects

CSP-LIR-USB: IR Learner

Notes:

1. Item(s) sold separately.
2. License required. The PRO3 supports a maximum of 2000 BACnet objects when dedicated for BACnet use only. Actual capabilities are contingent upon the overall program size and complexity.
3. Web-based installer setup requires the Microsoft® Internet Explorer® Web browser running on a Windows® PC.
4. The following connections comply with IEC 61000-4-5 Installation Class 4 surge immunity levels: COM 1 - 6, I/O 1 - 8, NET, LAN, and CONTROL SUBNET.

This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at www.crestron.com/salesreps or by calling 800-237-2041.

The specific patents that cover Crestron products are listed online at: patents.crestron.com.

Crestron, the Crestron logo, 3-Series, 3-Series Control System, Cresnet, Crestron Control, Crestron Fusion, Crestron Mobile Pro, Crestron Toolbox, Fusion EM, Fusion RV, RoomView, and Smart Graphics are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. BACnet and the BACnet logo are either trademarks or registered trademarks of American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc. in the United States and/or other countries. Apple, iPad, and iPhone are either trademarks or registered trademarks of Apple Inc. in the United States and/or other countries. Blu-ray Disc is either a trademark or registered trademark of the Blu-ray Disc Association in the United States and/or other countries. IOS is either a trademark or registered trademark of Cisco Technology, Inc. in the United States and/or other countries. Android is either a trademark or registered trademark of Google, Inc. in the United States and/or other countries. Microsoft, Internet Explorer, and Windows are either trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. Samsung Smart TV is either a trademark or registered trademark of Samsung Electronics Co., Ltd. in the United States and/or other countries. SD and SDHC are either trademarks or registered trademarks of SD-3C, LLC in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography. Specifications are subject to change without notice. ©2013 Crestron Electronics, Inc.

For further resources and
documentation please visit us:
www.cinos.net